

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 33 TOWNSHIP 15 RANGE 4

DATE: -4-17-02 8-8-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 4-9-96

IN. S.P.C. E ZONE NAD '83

NAME: 15043308

N: 493674.5220(m)

E: 63526.1990(m)

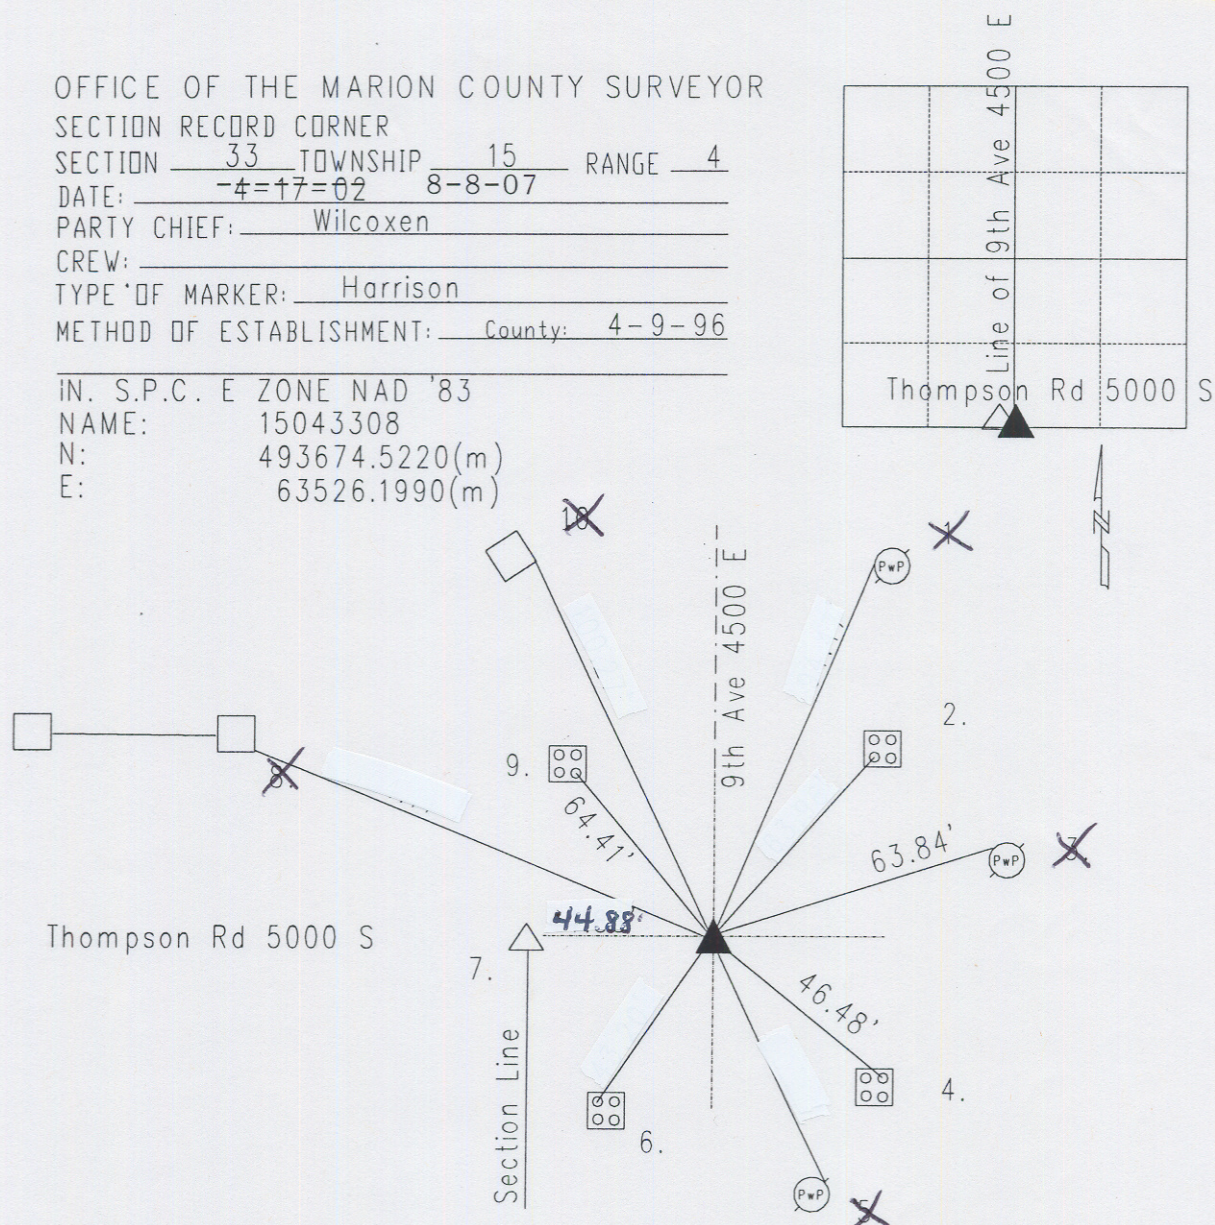

Original post set 1820 by Hendricks with witness: 20" ash N 32 W 15 links; 13" dogwood S 51 E 28 links per Marion County Atlas pg. 10 Hosbrook 5-26-1875 called rock found w/no witness per Perry Township Legal Survey Book pg. 69. Gorske 8-20-70 called railroad spike. Rednour 12-30-71 called nail in bottle cap. Wilcoxon 10-7-79 called railroad spike. Greene 8-10-88 called PK nail at surface. Excavated by Wilcoxon 4-9-96. Harrison set. Re-tied 4-9-96 by Wilcoxon. Re-tied 4-17-02 by Wilcoxon.

15043308

REF.	DISTANCE	DESCRIPTION
1.	94.47'	PK nail W PwP#77-703 A 36"up
2.	63.47'	Cut 'x' SW-bolt of traffic signal pole base
3.	63.84'	PK nail NW PwP#833-1075 36"up
4.	46.48'	Cut 'x' NE-bolt of traffic signal pole base
5.	30.31'	PK nail NE PwP#52-702 B 36"up
6.	43.15'	Cut 'x' NW-bolt of traffic signal pole base
7.	44.88'	Due W to NQ 4-14-4 (Harrison)
8.	104.11'	SW most corner column for Willow Glenn sign
9.	64.41'	Cut 'x' SE-bolt of traffic signal pole base
10.	100.27'	SE most corner column for Willow Glenn sign